Bandpass 590-50 HT

Schneider-Kreuznach magnetron sputtered industrial bandpass filters impress with steep slopes and high transmission at stable cut-on and cut-off wavelengths. The very flat surface makes them ideal for high end inspection systems.
Schneider-Kreuznach bandpass filters are RoHS conform. Custom sizes are available on request.

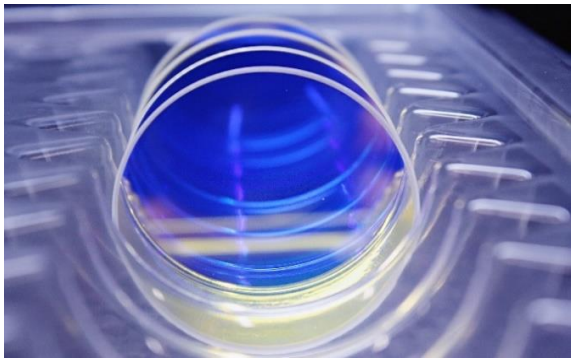

Key features

- Average transmittance 95%
- Steep slopes
- Wavelength tolerance +/- 1%
- Deep blocking / High optical density

Applications

- Automation
- 3D Measurement
- Food and beverage inspection
- Ophtalmology
- Microscopy
- Robotics

Standard Products		available on request	
Name	Description	Name	Description
BP 465-70 HT	Bandpass 430 - 500 nm	BP 490-180 HT	Bandpass 400 - 580 nm
BP 540-80 HT	Bandpass 495 - 580 nm	BP 515-270 HT	UV/IR Cut 380 - 650 nm
BP 540-300 HT	UV/IR Cut 390 - 690 nm	BP 520-280 HT	UV/IR Cut 380 - 660 nm
BP 575-170 HT	Bandpass 495 - 660 nm	VIS-85 HT	400 - 650 nm & 800 - 900 nm
BP 590-50 HT	Bandpass 565 - 615 nm	BP 590-200 HT	Bandpass 595 - 690 nm
BP 635-50 HT	Bandpass 610 - 660 nm	BP 640-100 HT	Bandpass 590 - 590 nm
BP 660-60 HT	Bandpass 630 - 690 nm	BP 680-100 HT	Bandpass 630 - 730 nm
BP 850-80 HT	Bandpass 810 - 890 nm		
BP 865-100 HT	Bandpass 815 - 915 nm		

© Jos. Schneider Optische Werke GmbH | 06/2023 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.

Bandpass 590-50 HT

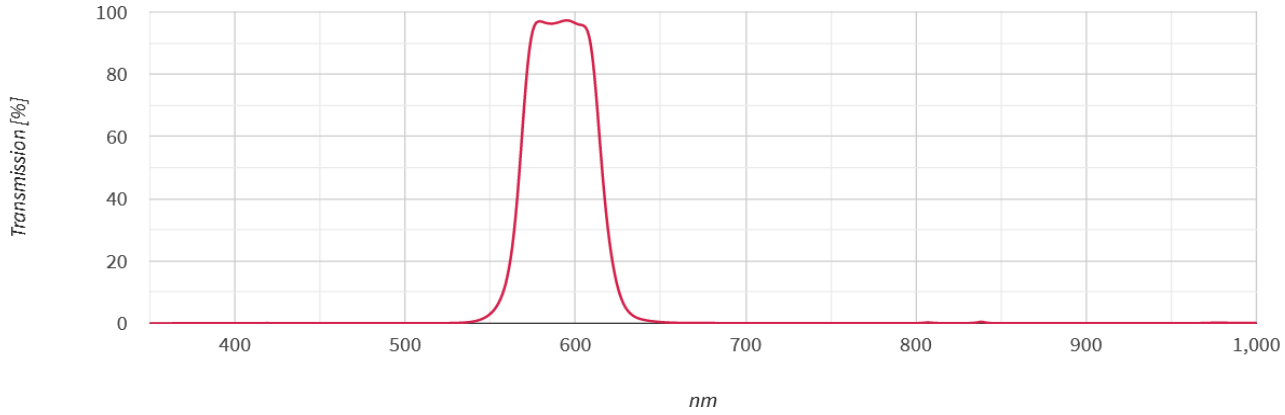

Technical specifications	according to ISO 10110
Angle of incident	0° +/- 8°
Cut-on wavelength	565 +/- 6 nm
Cut-off wavelength	615 +/- 6 nm
Transmittance	585 - 595 nm: T_{abs} > 90%
Blocking	< 530 nm: T_{abs} < 0.5%
	650 - 1000 nm: T_{abs} < 1.0%
Wavefront distortion	Ø >18 - 30 mm: 13/ 1(0.25) | Ø >30 - 50 mm: 13/ 1(0.30)
Parallelism	1'
Glass thickness tolerance	+/- 0.08mm

Mounted Industrial Filter [IF]			Unmounted Industrial Filterglass [IFG]		
Mount	Thickness	ID	Diameter	Thickness	ID
CMT	2mm	1084480	22.0 mm	2mm	*ID to be defined*
CMT	1mm	*ID to be defined*	22.0 mm	1mm	*ID to be defined*
SH 25.5	2mm	1089732	23.0 mm	2mm	*ID to be defined*
SH 25.5	1mm	*On request only*	23.0 mm	1mm	*On request only*
SH 27.0	2mm	1088593	24.0 mm	2mm	*ID to be defined*
SH 27.0	1mm	*On request only*	24.0 mm	1mm	*On request only*
SN1 30.5	2mm	1085648	29.0 mm	2mm	*ID to be defined*
SN1 30.5	1mm	*On request only*	29.0 mm	1mm	*On request only*
SH 34.0	2mm	1106698	31.0 mm	2mm	*ID to be defined*
SH 34.0	1mm	*On request only*	31.0 mm	1mm	*On request only*
SH 35.5	2mm	1092944	33.0 mm	2mm	*ID to be defined*
SH 35.5	1mm	*On request only*	33.0 mm	1mm	*On request only*
SH 37.0	2mm	1106699	34.0 mm	2mm	1082579
SH 37.0	1mm	*On request only*	34.0 mm	1mm	*ID to be defined*
SH 39.0	2mm	1105822	36.0 mm	2mm	*ID to be defined*
SH 40.5	2mm	1087907	38.0 mm	2mm	*ID to be defined*
SH 43.0	2mm	1085531	40.0 mm	2mm	*ID to be defined*
SH 46.0	2mm	1086648	43.0 mm	2mm	1082580
SH 49.0	2mm	1105108	46.0 mm	2mm	1107448

Custom sizes available on request.

Order Nomenclature	
IF BP 590-50 HT [Mount] [Thickness]	IFG BP 590-50 HT [Diameter] [Thickness]
Example: IF BP 590-50 HT SH 25.5 2	*Example: IFG BP 590-50 HT 23.0 2*

© Jos. Schneider Optische Werke GmbH | 06/2023 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.

Mounts

C-Mount

Defined by 1" (25.4mm) diameter and 32 turns per inch pitch, the C-Mount thread is a popular camera mount in machine vision industry. Schneider-Kreuznach offers a CMT mount option for most filters. So filters fit in any C-Mount based mechanics, including the C-Mount thread of a camera. The extension of the back flange distance has to be considered for imaging applications.

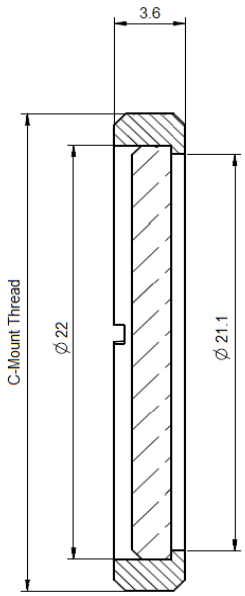

Key features	Applications
• Fits in C-Mount cameras • Robust • Black anodized brass	• Mounted in C-Mount camera threads • In vision systems based on C-Mount mechanics

Thread	Diameter	Clear Aperture	Thickness
1'' - 32	25.4 mm	21.1 mm	3.6 mm

SH-Mount

SH-Mount is the standard thread mount when high flexibility and stability is required. The filter glass is hold in place by a retainer ring. SH-Mounts are extremely robust, have a female and male M-thread and can be stacked if several filters must be combined.

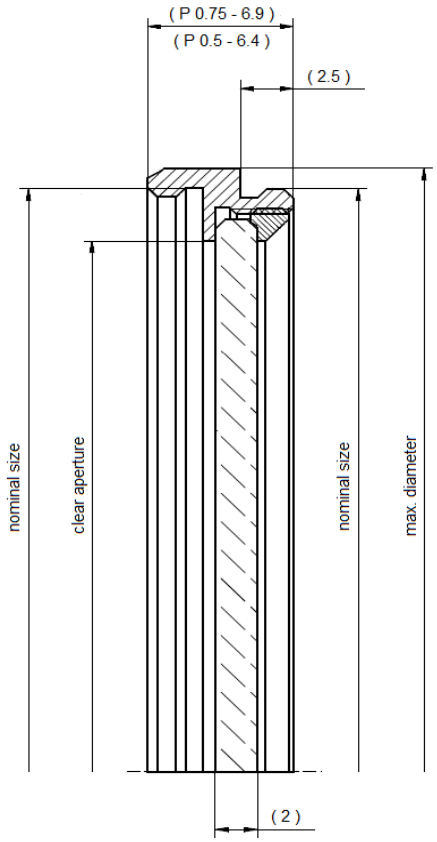

Key features	Applications
• Stackable • Robust • Black anodized brass	• Mounted on lenses • Mounted on measurement instruments

Thread	Diameter	Clear Aperture	Thickness
M 25.5x0.5	27.0 mm	20.8mm	6.4 mm
M 27.0x0.5	28.5 mm	21.8 mm	6.4 mm
M 34.0x0.5	36.0 mm	28.8 mm	6.4 mm
M 35.5x0.5	37.0 mm	30.8 mm	6.4 mm
M 37.0x0.75	39.0 mm	31.8 mm	6.9 mm
M 39.0x0.5	40.5 mm	33.8 mm	6.4 mm
M 40.5x0.5	42.0 mm	35.8 mm	6.4 mm
M 43.0x0.75	45.0 mm	37.8 mm	6.9 mm
M 46.0x0.75	48.0 mm	40.8 mm	6.9 mm
M 49.0x0.75	51.0 mm	43.8 mm	6.9 mm
M 52.0x0.75	54.0 mm	46.8 mm	6.9 mm
M 55.0x0.75	57.0 mm	49.8 mm	6.9 mm
M 58.0x0.75	60.0 mm	52.8 mm	6.9 mm
M 62.0x0.75	64.5 mm	56.8 mm	6.9 mm
M 67.0x0.75	69.5 mm	61.8 mm	6.9 mm

© Jos. Schneider Optische Werke GmbH | 06/2023 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.

Mounts

SN1-Mount

The SN1-Mount was designed for the popular M30.5x0.5 thread. With its high clear aperture, vignetting can be avoided even for wide angle applications. The filter is glued into the mount. So it is secured against vibrations when integrated into robots or production lines. It is ideal to be used in automated fabrication. SN1-Mounts have a male and female M-thread and can be stacked if several filters must be combined.

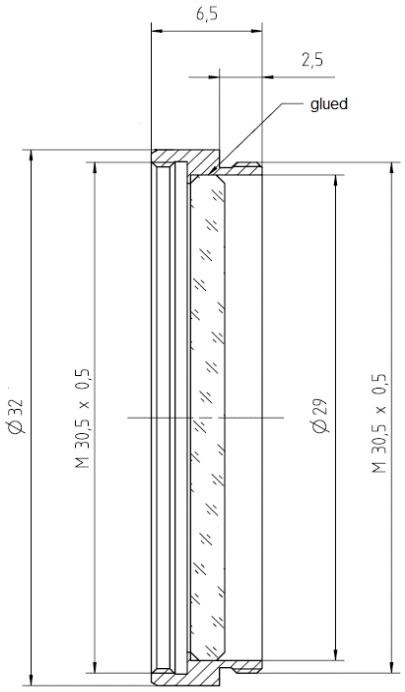

Key features	Applications
• Maximum clear aperture • No vignetting • Stackable • Robust • Black anodized brass	• Mounted on lenses • Mounted on measurement instruments

Thread	Diameter	Clear Aperture	Thickness
M 30.5x0.5	32 mm	28 mm	6.5 mm

© Jos. Schneider Optische Werke GmbH | 06/2023 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.

Contact

Headquarters Europe

Jos. Schneider Optische Werke GmbH
Ringstraße 132
55543 Bad Kreuznach
+49 671 601 205
isales@schneiderkreuznach.com
www.schneiderkreuznach.com

Offices Worldwide

America
+1 800 645 7239 (East Coast)
+1 800 228 1254 (West Coast)
info@schneideroptics.com

Asia
+86 755 8832 1170
info@schneider-asiapacific.com

© Jos. Schneider Optische Werke GmbH | 06/2023 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.